



PLAN VIEW

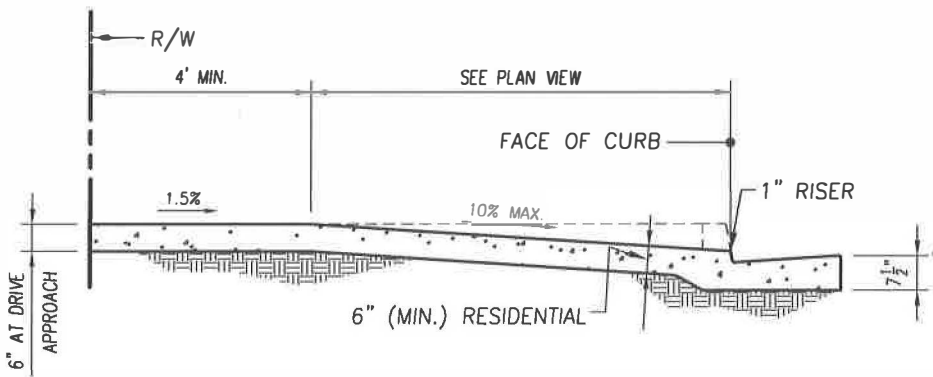

SECTION A-A




SECTION B-B

NOTES:

1. ALL CONCRETE SHALL BE CLASS 2 CONCRETE.
2. EXPANSION JOINTS SHALL BE ASPHALT SATURATED CELLULOSIC FIBER IN PRE-FORMED STRIPS MEETING THE REQUIREMENTS OF ASTM D1751. EXPANSION JOINT STRIPS SHALL EXTEND FULL DEPTH OF CONCRETE AND SHALL BE SET FLUSH WITH TOP OF CONCRETE SURFACE.
3. SEE DRAWING NO. 2110 FOR DRIVE APPROACH WIDTH INFORMATION.
4. TYPES OF FINISH: CURB - STEEL TROWEL
GUTTER, DRIVEWAY, & SIDEWALK - BROOM
5. COMPACT UPPER 6" OF SUBGRADE UNDER CURB, GUTTER AND DRIVE APPROACH TO 95% REL. COMPACTION (ASTM D1557).

REVISIONS	DATE



CITY OF TULARE
PUBLIC IMPROVEMENT STANDARD
RESIDENTIAL DRIVE APPROACH
(TYPE III)

DRAWING NO.:
2113

Approved By: *Michael W. Miller*
Date: 11/15/16 City Engineer