



90° PARKING

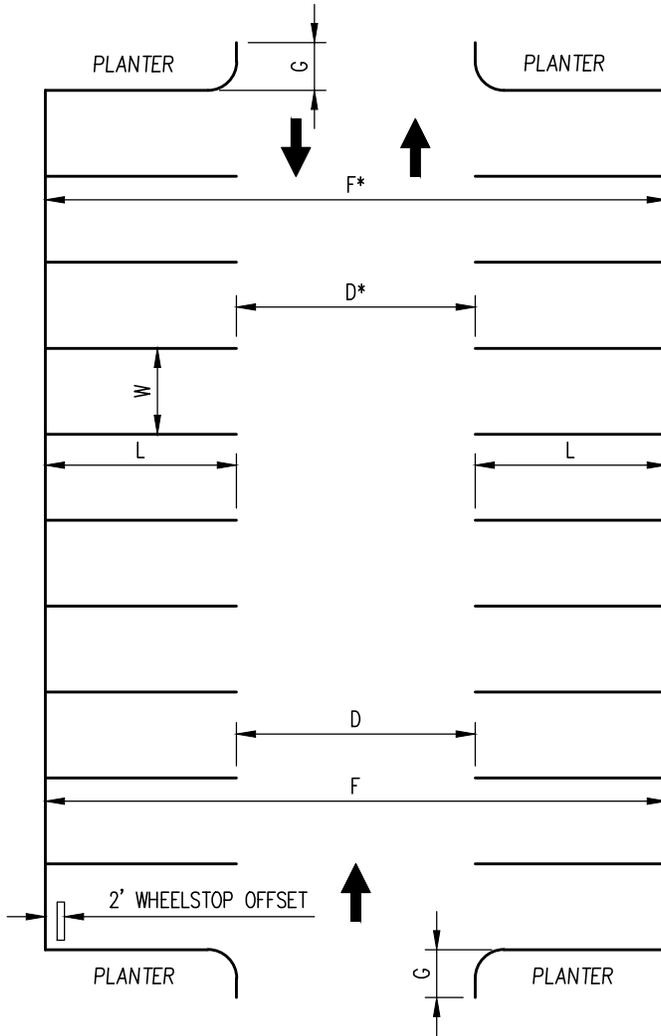

PARALLEL PARKING

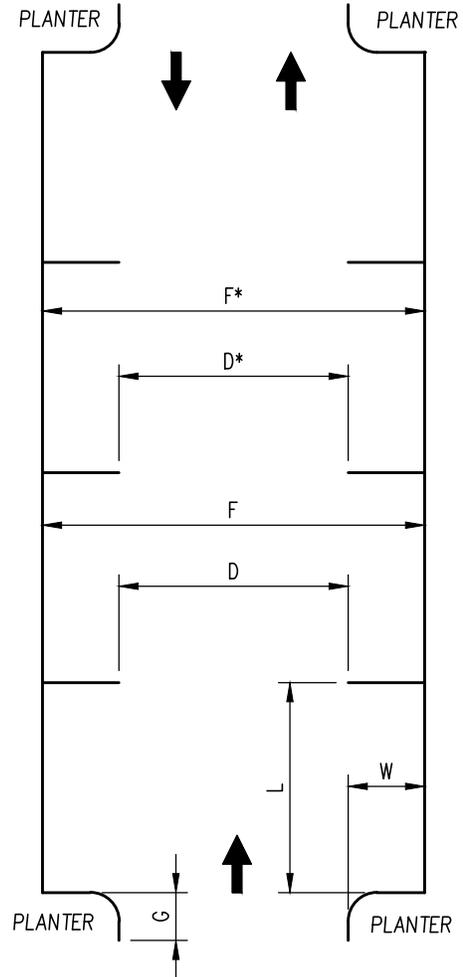

ANGLE	W	L	D	D*	F	F*	G
90°	9.0	20.0	25.0	25.0	65.0	65.0	5.0
PARALLEL	8.0	22.0	15.0	24.0	31.0	40.0	5.0


*DIMENSIONS FOR TWO-WAY CIRCULATION SYSTEM

NOTES:

1. ACCESSIBLE PARKING STALLS AND ACCESSIBLE ROUTES SHALL COMPLY WITH CURRENT CBC AND ADA STANDARDS.
2. WHEEL STOPS ARE REQUIRED TO PROTECT WALKWAYS WHEN A VEHICLE OVERHANG OF 2 FEET WOULD RESULT IN LESS THAN 48 INCHES OF CLEAR PATH OF TRAVEL ON ADJACENT SIDEWALKS, OR WHEN REQUIRED TO PROTECT STRUCTURES OR ADJACENT FACILITIES.
3. WHERE WHEEL STOPS ARE NOT REQUIRED AND VEHICLES HAVE SPACE TO OVER-HANG BY A MINIMUM OF 2 FEET, PARKING STALL DIMENSION "L" MAY BE REDUCED TO 18 FEET.
4. WHERE FIRE DEPARTMENT ACCESS IS REQUIRED, MINIMUM DRIVE AISLE WIDTH SHALL BE 20 FEET.
5. CONCRETE CURBING AT AT LEAST SIX INCHES TALL AND SIX INCHES WIDE SHALL BE PROVIDED AROUND ALL PERIMETER AREAS AND AROUND ALL LANDSCAPE AREAS.

REVISIONS	DATE		CITY OF TULARE PUBLIC IMPROVEMENT STANDARD PARKING STANDARDS	DRAWING NO.:
REV. NO. 1	11/15/21			
			Approved By: <i>Michael W. Miller</i>	
			Date: 11/15/2021	City Engineer
				1 OF 2

30°, 45° & 60° PARKING

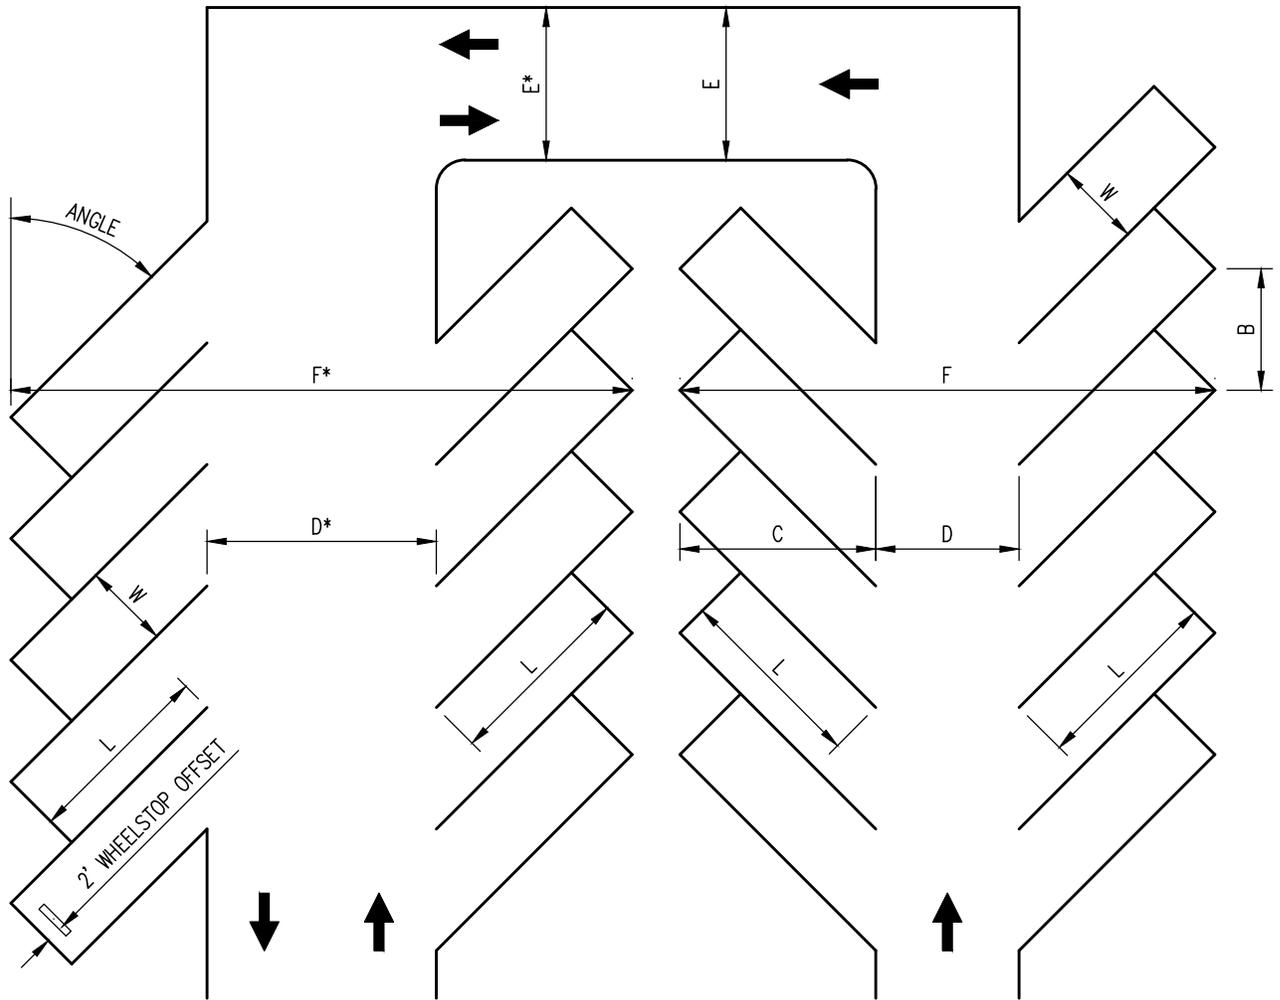

ANGLE	W	L	B	C	D	D*	E	E*	F	F*	G
60°	9.0	20.0	10.4	20.0	15.0	24.0	15.0	20.0	58.0	64.0	5.0
45°	9.0	20.0	12.7	19.1	15.0	24.0	15.0	20.0	50.2	62.2	5.0
30°	8.5	20.0	17.0	16.5	15.0	24.0	15.0	20.0	45.0	57.0	5.0

*DIMENSIONS FOR TWO-WAY CIRCULATION SYSTEM

NOTES:

1. ACCESSIBLE PARKING STALLS AND ACCESSIBLE ROUTES SHALL COMPLY WITH CURRENT CBC AND ADA STANDARDS.
2. WHEEL STOPS ARE REQUIRED TO PROTECT WALKWAYS WHEN A VEHICLE OVERHANG OF 2 FEET WOULD RESULT IN LESS THAN 48 INCHES OF CLEAR PATH OF TRAVEL ON ADJACENT SIDEWALKS, OR WHEN REQUIRED TO PROTECT STRUCTURES OR ADJACENT FACILITIES.
3. WHERE WHEEL STOPS ARE NOT REQUIRED AND VEHICLES HAVE SPACE TO OVER-HANG BY A MINIMUM OF 2 FEET, PARKING STALL DIMENSION "L" MAY BE REDUCED TO 18 FEET.
4. WHERE FIRE DEPARTMENT ACCESS IS REQUIRED, MINIMUM DRIVE AISLE WIDTH SHALL BE 20 FEET.
5. CONCRETE CURBING AT AT LEAST SIX INCHES TALL AND SIX INCHES WIDE SHALL BE PROVIDED AROUND ALL PERIMETER AREAS AND AROUND ALL LANDSCAPE AREAS.

<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">REVISIONS</th> <th style="text-align: left;">DATE</th> </tr> </thead> <tbody> <tr> <td>REV. NO. 1</td> <td>11/15/21</td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> </tbody> </table>	REVISIONS	DATE	REV. NO. 1	11/15/21								<p>CITY OF TULARE PUBLIC IMPROVEMENT STANDARD PARKING STANDARDS</p> <p>Approved By: <i>Michael W. Miller</i></p> <p>Date: 11/15/2021 City Engineer</p>	<p>DRAWING NO.:</p> <p style="font-size: 24pt; font-weight: bold; text-align: center;">2210</p> <p style="text-align: right;">2 OF 2</p>
REVISIONS	DATE												
REV. NO. 1	11/15/21												